






INNOVATED FOR TOP BRAND MICROSCOPES
Create a Stunning Microscope Imaging System for You



■ Digital Polarizing Microscope (Upgrade with Ei)



Solution ①

Smart Embedded Display Camera
With 0.43X tube lens



Solution ②

Smart Embedded Camera
With 0.43X tube lens



Solution ③

WiFi Embedded Camera
With 0.43X tube lens



Function Comparison


● Standard ○ Optional – N/A

	Solution①	Solution②	Solution③
Built-in Android OS	●	●	–
Pre-installed Office suits	●	●	–
15.6"high color gamut monitor	●	–	–
Image output methods			
5G WiFi	●	●	●
USB	–	–	●
HDMI or DP	● DP	● DP	● HDMI
Network	–	–	●

❗ Solution③ HDMI output method is unavailable for 20.0MP cameras.

Polarizing accessories

0.1mm eyepiece micrometer



Analyzer

Beitrand lens
Fixed center,
fixed spacing

Compensator
(λ , $\lambda/4$, Quartz wedge)


Quartz wedge λ $\lambda/4$



Rotating nosepiece (Internal rotation 4-hole
nosepiece fixed to the microscope body)

Centering device

Rotating stage (Φ 142mm)

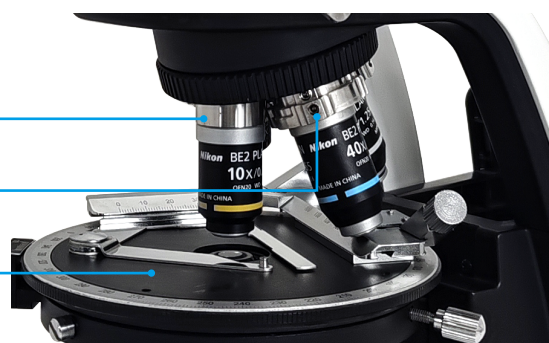

Polarizer



Polarizer (360°rotation, with mark)

Field diaphragm

Light source

360°rotation, with mark



0°



90°



180°

Polarizing accessories

1.Eyepiece micrometer



2.Intermediate mirror body



3.Quartz wedge



4. λ time delay film



5. $\lambda/4$ time delay film



6. Centring device




7. Objective lens extension ring



8.Circular stage




9.Polarising lens fixing cap



10. Polarizer



11. Tool box



12.Narrow wave plate + narrow wave plate fixing block (optional)



13.XY moving ruler(optional)




NO	Name	Serial number
1	Eyepiece micrometer	HP180100
2	Intermediate mirror body	HP185900
3	Quartz chisel	HP180800
4	λ time-delay film	HP186100
5	$\lambda/4$ time-delay disc	HP186000
6	Centering device	HP180300
7	Objective extension ring	HP170800
8	Circular stage	HP180500
9	Polarising lens fixing cap	HP195200
10	Polarizer	HP180400
11	Tool box	HP104400
12	Narrow wave plate, narrow wave plate fixing block	HP180900,HP192700
13	XY moving ruler	HP189500

Solution① Smart Embedded Display Camera



Features & Benefits

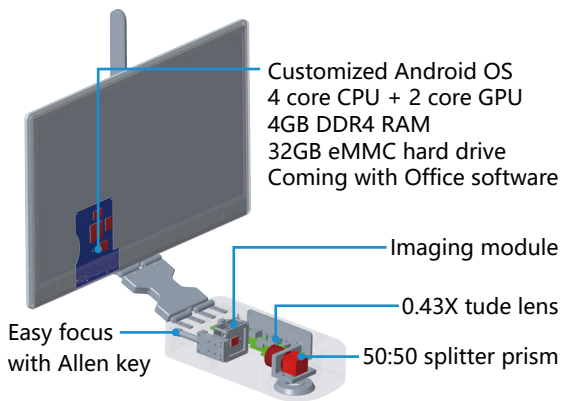

- Built-in operating system Android processor RK3399, office suit(Word,Excel, Powerpoint) are preinstalled, no need computer.
- Integrated with 15.6" high-definition ISP display.
- Comes with an imaging app that displays live images upon startup.
- Features a 50:50 light-splitting design that preserves the original optical system.
- Professional NPBS beam splitter to ensure true color reproduction.
- Includes a high-power 0.43X tube lens for a wide field of view.
- 32GB built-in eMMC with support for external U-disk storage for pictures and videos.
- USB interface allows for easy connection of keyboards and mouse.

5G WiFi and DP are simultaneous outputs



5G WiFi output

Compatible with various devices and operating systems, including Windows, iOS, and Android. Mobile devices can access the system by scanning a QR code. connects to PC via WiFi.



DP output



With DP output for display on monitors, TVs and projectors.





Connecting to the Internet

The camera supports wireless Internet connection (only supports 5G WiFi router signal), by entering the password of any 5G WiFi network, you can directly open the browser to access the Internet. This will allow you to take advantage of online features and functionalities directly from your camera.

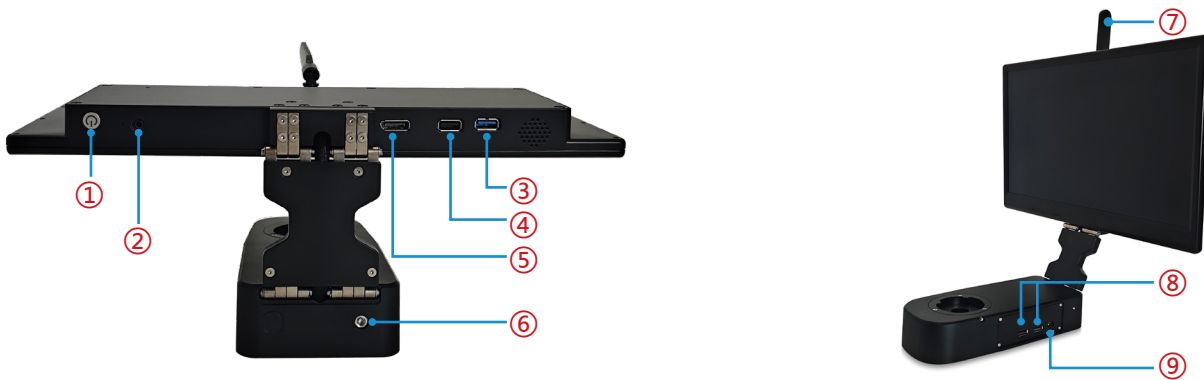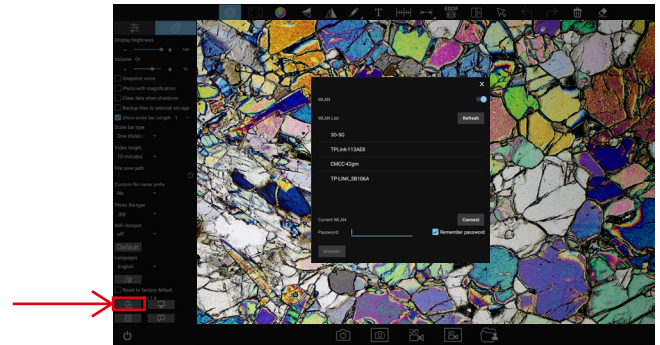

①	Power switch	Switch on/off
②	Headphone and microphone ports	Connect with headset cable for audio output
③	USB 3.0 interface	Can be connected to a mouse, keyboard, USB flash drive (for copying videos and images). Or you can use the manufacturer's optional USB to DC5V power cord to power the Ei and Si
④	USB 2.0 interface	
⑤	DP output interface	Transmission via DP cable, connected to a display device
⑥	Easy focus with allen key	Simple and precise focus adjustment for synchronization between eyepiece and monitor
⑦	5G WiFi antenna	5G WiFi signal transmission to connect the camera to capture images or control the camera
⑧	USB 2.0 interface	Can be connected to mouse, keyboard, U disk
⑨	Power input	DC 12V 3A

Specifications

15.6" high color gamut display

Number of pixels	1920(horizontal) x 1080 (vertical)
Pixels arrangement	RGB vertical stripe
Colour gamut	100% (sRGB)
Display number of colors	16.7M(8Bit)
Surface treatment	Anti-glare
Surface hardness	3H
Viewing angel range	170 horizontal, 170 vertical
Contrast	800
Brightness	500cd/m ² (average of 5 points)

Applicable to	Nikon
Models	TC200
Category	ED-N-12
Physical resolution	12.0MP
Image sensor	SONY IMX412 CMOS
Exposure mode	Rolling Shutter
Maximum resolution	4000×3000 (12,000,000Pixels)
ISO sensitivity	Equivalent to 100-12800
Sensor size	1/2.3"
Pixel size	1.55μm×1.55μm
Spectral response	380-650nm
Exposure capability	Real-time auto and manual adjustment
Exposure time	10μs-333ms
White balance	Real-time auto and manual RB adjustment
Preview resolution	4000×3000@30fps,3840×2160@30fps
Power supply	DC 12V 3A
Wireless protocol	5G WiFi IEEE802.11ac
A/D conversion bit depth	12bit
Software and App	Windows Software:KoPa Capture Pro,Embedded software:KoPa WiFi Lab AO,App:KoPa WiFi Lab

Accessories

Power adapter and power cord
(Optional Chinese, American, European,
Australian, Korean, British standard etc.)




USB mouse
and keyboard




Dimensions(Unit:mm)

Net weight ≈2.6kg

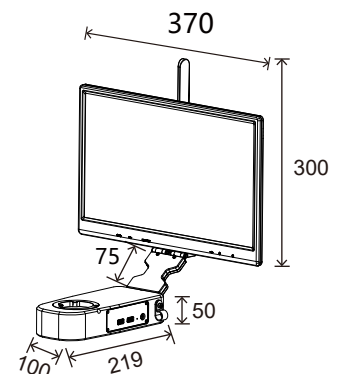



Features & Benefits

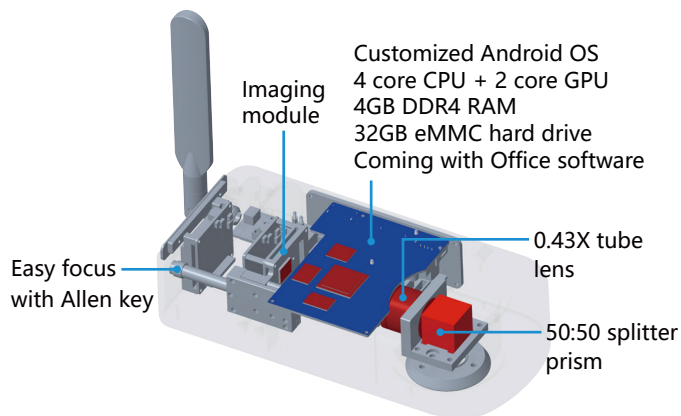

- Built-in operating system Android processor RK3399, office suit(Word,Excel, Powerpoint) are preinstalled, no need computer.
- Comes with an imaging app that displays live images upon startup.
- Features a 50:50 light-splitting design that preserves the original optical system.
- Professional NPBS beam splitter prism to ensure true color reproduction.
- Includes a high-power 0.43X tube lens for a wide field of view.
- 32GB built-in eMMC with support for external U-disk storage for pictures and videos.
- USB interface allows for easy connection of keyboards and mouse.

5G WiFi and DP are simultaneous outputs



5G WiFi output

Compatible with various devices and operating systems, including Windows, iOS, and Android. Mobile devices can access the system by scanning a QR code. connects to PC via WiFi.



DP output

With DP output for display on monitors, TVs and projectors.







Connecting to the Internet

The camera supports wireless Internet connection (only supports 5G WiFi router signal), by entering the password of any 5G WiFi network , you can directly open the browser to access the Internet.

This will allow you to take advantage of online features and functionalities directly from your camera.

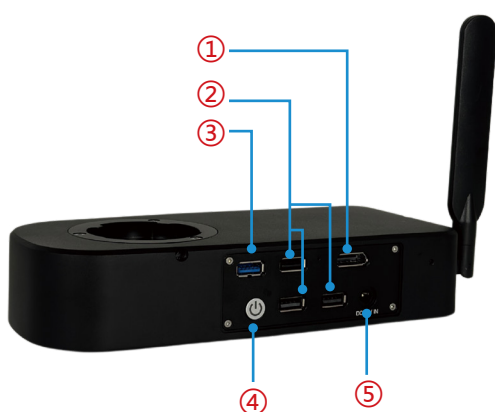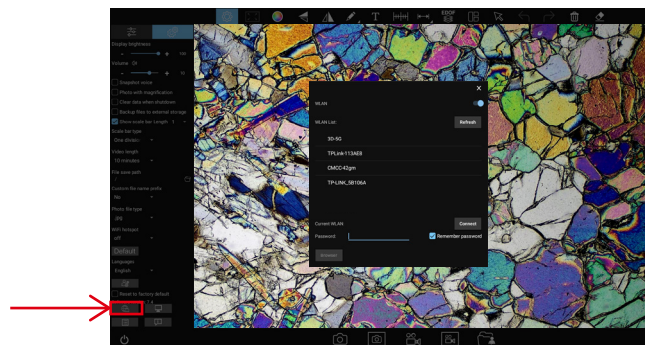

	DP output interface	Transmission via DP cable, connected to a display device
	USB 2.0 interface	Can be connected to a mouse, keyboard, USB flash drive (for copying videos and images).Or you can use the manufacturer's optional USB to DC5V power cord to power the Ei and Si
	USB 3.0 interface	
	Power switch	Switch on/off
	Power input	DC 12V 3A
	5G WiFi antenna	5G WiFi signal transmission to connect the camera to capture images or control the camera
	Easy focus with allen key	Simple and precise focus adjustment for synchronization between eyepiece and monitor

Specifications

Applicable to	Nikon
Models	HW200
Category	EC-N-12
Physical resolution	12.0MP
Image sensor	SONY IMX412 CMOS
Exposure mode	Rolling Shutter
Maximum resolution	4000×3000 (12,000,000Pixels)
ISO sensitivity	Equivalent to 100-12800
Sensor size	1/2.3"
Pixel size	1.55μm×1.55μm
Spectral response	380-650nm
Exposure capability	Real-time auto and manual adjustment
Exposure time	10μs-333ms
White balance	Real-time auto and manual RB adjustment
Preview resolution	4000×3000@30fps,3840×2160@30fps
Power supply	DC 12V 3A
Wireless protocol	5G WiFi IEEE802.11ac
A/D conversion bit depth	12bit
Software and App	Windows Software:KoPa Capture Pro,Embedded software:KoPa WiFi Lab AO,App:KoPa WiFi Lab

Accessories

Power adapter and power cord
(Optional Chinese, American, European, Australian, Korean, British standard etc.)



DP cable




USB mouse
and keyboard




Dimensions(Unit:mm)

Net weight ≈1.3kg





Features & Benefits

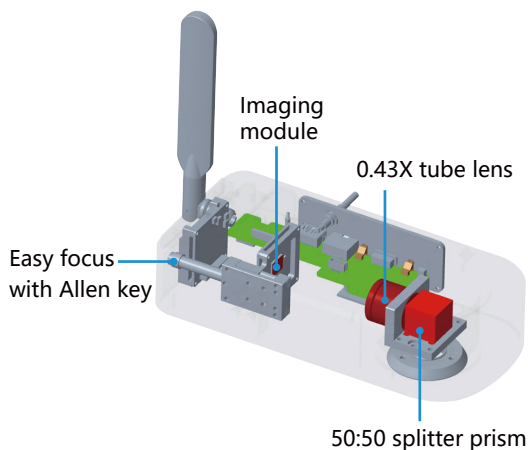

- Features a 50:50 light-splitting design that preserves the original optical system.
- Professional NPBS beam splitter prism to ensure true color reproduction.
- Includes a high-power 0.43X tube lens for a wide field of view.



5G WiFi output

Compatible with various devices and operating systems, including Windows, iOS, and Android. Mobile devices can access the system by scanning a QR code. connects to PC via WiFi.



HDMI output

Connects to PC via WiFi, with HDMI output for display on monitors, TVs and projectors.



No software, only live images are available, at which point the camera image properties can be controlled via WiFi or USB.




USB output

Supports connection to a computer via USB 2.0. You can utilize the KoPa Capture Pro software or any standard UVC 2.0 protocol software to access the camera's real-time images without the need for driver installation.



Network output

Connect the camera to the router or switch through the network cable, up to 13 units computers, mobile phones and tablets in the LAN can access and control the images as long as they have installed the software and APP.

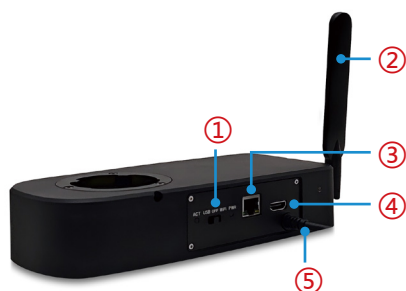

①	USB/OFF/WiFi working mode switching	Two working modes switching
②	5G WiFi antenna	5G WiFi signal transmission to connect the camera to capture images or control the camera
③	Network output interface	When in WiFi working mode,; connect to a router or switch to access a LAN so that Windows computers, smartphones, and tablets on the LAN can share the microscopic screen; or connect to the Internet directly.
④	HDMI output interface (only 12.0MP camera)	The display device is connected and the image can be displayed, but the image cannot be controlled
⑤	USB output/ power supply	Two in one: data transmission and power supply.
⑥	Easy focus with allen key	Simple and precise focus adjustment for synchronization between eyepiece and monitor.

Specifications

Applicable to	Nikon
Models	FF48
Category	EB-N-12
Physical resolution	12.0MP
Image sensor	SONY IMX412 CMOS
Exposure mode	Rolling Shutter
Maximum resolution	4000×3000 (12,000,000Pixels)
ISO sensitivity	Equivalent to 100-12800
Sensor size	1/2.3"
Pixel size	1.55μm×1.55μm
Spectral response	380-650nm
Exposure capability	Real-time auto and manual adjustment
Exposure time	10μs-333ms
White balance	Real-time auto and manual RB adjustment
Preview resolution	4000×3000@30fps,3840×2160@30fps
Power supply	DC 12V 3A
Wireless protocol	5G WiFi IEEE802.11ac
A/D conversion bit depth	12bit
Software and App	Windows Software:KoPa Capture Pro, App:KoPa WiFi Lab

Accessories

HDMI cable(optional,
only for 12.0MP camera)




Gigabit ethernet cable
(optional)



Dimensions(Unit:mm)

Net weight ≈1.2kg



1. Comply with FCC certification of The US Federal Communication Commission.
2. Comply with European (standard) safety CE certification.
3. Comply with the MIC certification issued by the Ministry of Internal Affairs and Communications of Japan (Electric Wave Method and Electro-Optical Communication Business Law).
4. Comply with JATE certification of Japanese telecommunications law directive.
5. Comply with the "Directive on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment" (RoHS) Directives in accordance with EU legislation.

Evaluation object	Certification	Certificate File Name & Report	Certificate number & corresponding report number
WF01A(5G WiFi 11ac)module Certification	US FCC Report	SZEM180100024801-5G wifi RPT-WF01A FCC Report	SZEM180100024801
		SZEM180100024802-RT-WF01A FCC Report	SZEM180100024802
		Appendix A-Photographs of EUT Constructional Details for SZEM1801000248CR-FCC	SZEM1801000248CR
	US FCC ID Certification	2AFO3WF01A_NII-WF01A FCC ID	2AFO3WF01A
	EU CE report	SZEM180100024901 EN301489 RPT-WF01A CE Report	SZEM180100024901
		SZEM180100024902 WIFI5G RPT-WF01A CE Report	SZEM180100024902
	Japanese MIC Certification	CSRT180084-WF01A Japanese MIC Certification	CSRT180084
	Japanese JATE Certification	CSTT180018-WF01A Japanese JATE Certification	CSTT180018

Patented

Patent category	Patent name	Patent number
Design patent	Electronic eyepiece	ZL 2015 3 0193227.8
	Wireless electronic eyepiece	ZL 2015 3 0193223.X
	Electronic eyepiece with spectroscopic system	ZL 2019 3 0331144.9
	Microscope (with splitting prism camera)	ZL 2019 3 0717439.X
	Microscope with camera	ZL 2019 3 0717442.1
Utility model patents	WiFi microscope eyepiece	ZL 2015 2 0296469.4
	Electronic eyepiece	ZL 2015 2 0426409.X
	Wireless electronic eyepiece	ZL 2015 2 0426313.3
	Microscope with displayer	ZL 2019 2 0928962.1
	Electronic eyepiece with splitting prism system	ZL 2019 2 1022863.3

Software copyright

Category	Name of software	Platform	License number
Computer software copyright registration certificate	KoPa Capture Pro	Windows	2021SR1287730
	KoPa WiFi Lab AO	Android	2021SR1304520
	KoPa WiFi Lab	Android	2019SR0117768
		iOS	2019SR0028558
	KoPa View	Linux	2024SR1617066

KoPa® GuangZhou Ostec Electronic Technology Co.,Limited

Manufacturer: No.8 West Lane, Jiangcheng Road, Bangjiang East Village,Dalong street, Panyu District, Guangzhou, China.



High-Tech Enterprise certificate number:
GR202344009665



ISO9001 Verification No:00223Q26818R3S

The content of this leaflet has been reviewed by our company at the time of its release. Due to technological development, the actual product is subject to change without notice.

The names of other companies, product names, and trademarks **OLYMPUS** **Nikon** **Leica** **ZEISS** **Apple** **Android** **HarmonyOS** **W** **Q** **du** recorded on this leaflet are owned by their companies