



Microscope Camera Solutions

For Evident (Olympus) Life Science

INNOVATED FOR TOP BRAND MICROSCOPES
Create a Stunning Microscope Imaging System for You



For Trinocular Stereo Microscopes



Applicable Models:
SZX10, SZX16

Solution ①
Smart Display Camera
C-mount



Solution ②
Smart Camera
C-mount



Function Comparison

● Standard ○ Optional – N/A

	Solution①	Solution②
Built-in Android OS	●	●
Pre-installed Office suits	●	●
15.6"high color gamut monitor	●	–
Image output methods		
WiFi	●	●
USB	–	–
DP	●	●
Network	–	–

Solution① Smart Display Camera

Build a PC-free Imaging System for Your Microscope

Features & Benefits

- Built-in operating system Android processor RK3588-S, office suit(Word,- Excel, Powerpoint) are preinstalled, no need computer.
- Integrated with 15.6" high brightness, wide color gamut and blue light filtered ISP display.
- Comes with an imaging app that displays live images upon startup.
- 64GB built-in eMMC with support for external U-disk storage for pictures and videos.
- USB interface allows for easy connection of keyboards and mouse.



WiFi and DP are simultaneous outputs



WiFi output

Compatible with various devices and operating systems, including Windows, iOS, and Android. Mobile devices can access the system by scanning a QR code. connects to PC via WiFi. WiFi operating bands: 5G (5.180–5.825 GHz); 6G (5.925–6.425 GHz, 6.425–7.125 GHz), manually switchable, select one of two.




DP output


With DP output for display on monitors, TVs and projectors.



Connecting to the Internet

The camera supports wireless Internet connection (supports WiFi router signal), by entering the password of any WiFi network , you can directly open the browser to access the Internet. This will allow you to take advantage of online features and functionalities directly from your camera.

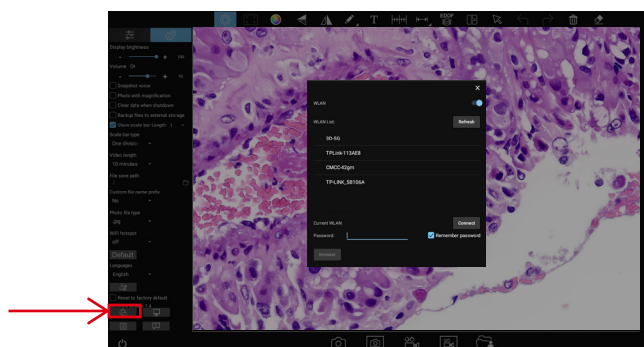

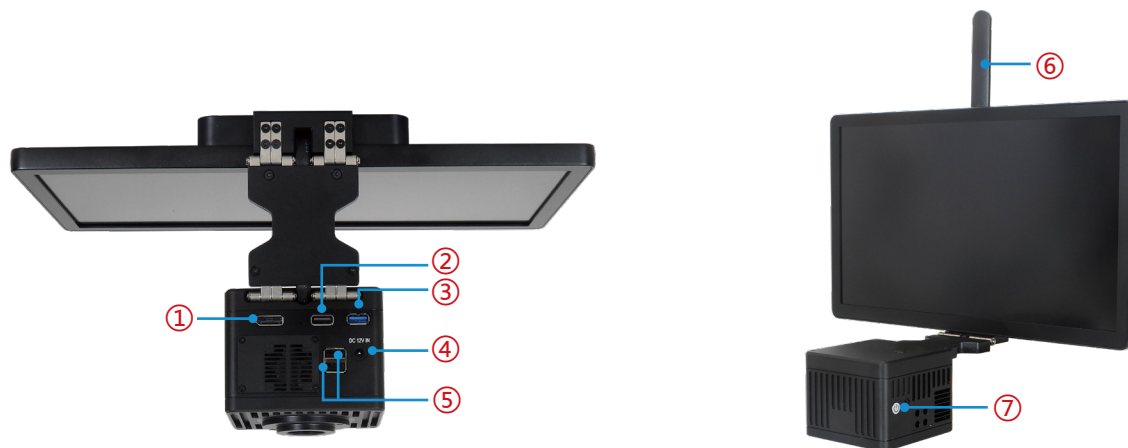

①	DP output interface	Transmission via DP cable, connected to a display device
②	USB 2.0 interface	Can be connected to a mouse, keyboard, USB flash drive (for copying videos and images).Or you can use the manufacturer's optional USB to DC5V power cord to power the CX23
③	USB 3.0 interface	
④	Power input	DC 12V 3A
⑤	USB 2.0 interface	Can be connected to a mouse, keyboard, USB flash drive (for copying videos and images).Or you can use the manufacturer's optional USB to DC5V power cord to power the CX23
⑥	WiFi antenna	WiFi signal transmission to connect the camera to capture images or control the camera
⑦	Power switch	Switch on/off

Specifications

15.6" high brightness, wide color gamut and blue light filtered ISP display.

Number of pixels	3840(horizontal) x 2160 (vertical)
Pixels arrangement	RGB vertical stripe
Colour gamut	100% Adobe RGB(135%sRGB)
Display number of colors	16.7M(8Bit)
Surface treatment	Anti-glare
Surface hardness	3H
Viewing angel range	170 horizontal, 170 vertical
Contrast	1500 : 1
Brightness	1000cd/m ² (average of 5 points)

Models	JX200
C-mount category	DJ6E-C-50
Physical resolution	50.3MP
Image sensor	SONY IMX06A CMOS
Exposure mode	Rolling Shutter
Maximum resolution	8192×6144 (50,331,648Pixels)
ISO sensitivity	Equivalent to 100-6400
Sensor size	1/0.98"
Pixel size	1.6μm×1.6μm
Spectral response	380-650nm
Exposure capability	Real-time auto and manual adjustment
Exposure time	100us-333ms
White balance	Real-time auto and manual RB adjustment
Preview resolution	8128×6144@16fps, 4096×3072@60fps
Photo resolution	8192×6144, 8128×6144, 8128×4608, 4096×3072, 4096×2304
Power supply	DC 12V 3A
Wireless protocol	WiFi 6E (IEEE802.11ax)
A/D conversion bit depth	10bit
Software and App	Windows Software:KoPa Capture Pro,Embedded software:KoPa WiFi Lab AO,App:KoPa WiFi Lab

Accessories

Power adapter and power cord
(Optional Chinese, American, European, Australian, Korean, British standard etc.)




USB mouse and keyboard



Dimensions(Unit:mm)

Net weight ≈2kg
Camera with C-mount

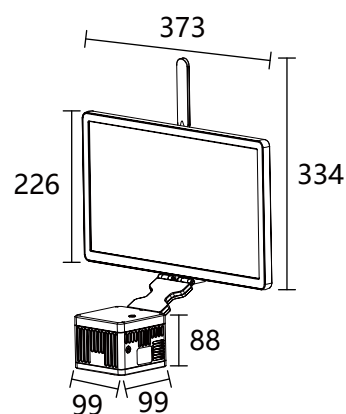

Solution② Smart Camera

Build a PC-free Imaging System for Your Microscope

Features & Benefits

- Built-in operating system Android processor RK3588-S, office suit(Word,Excel, Powerpoint) are preinstalled, no need computer.
- Comes with an imaging app that displays live images upon startup.
- 64GB built-in eMMC with support for external U-disk storage for pictures and videos.
- USB interface allows for easy connection of keyboards and mouse.




WiFi and DP are simultaneous outputs



WiFi output

Compatible with various devices and operating systems, including Windows, iOS, and Android. Mobile devices can access the system by scanning a QR code. connects to PC via WiFi. WiFi operating bands: 5G (5.180–5.825 GHz); 6G (5.925–6.425 GHz, 6.425–7.125 GHz), manually switchable, select one of two.




DP output

With DP output for display on monitors, TVs and projectors.



Connecting to the Internet

The camera supports wireless Internet connection (supports WiFi router signal), by entering the password of any WiFi network , you can directly open the browser to access the Internet. This will allow you to take advantage of online features and functionalities directly from your camera.

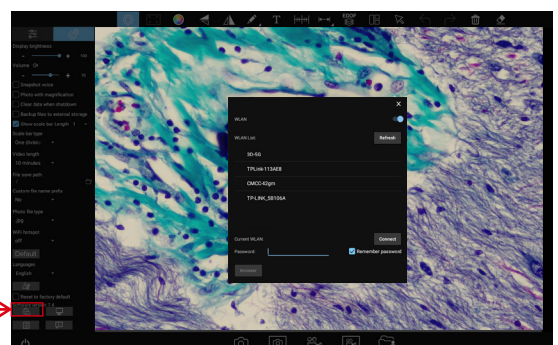



①	WiFi antenna	WiFi signal transmission to connect the camera to capture images or control the camera
②	DP output interface	Transmission via DP cable, connected to a display device
③	USB 2.0 interface	Can be connected to a mouse, keyboard, USB flash drive (for copying videos and images).Or you can use the manufacturer's optional USB to DC5V power cord to power the CX23
④	USB 3.0 interface	
⑤	Power input	DC 12V 3A
⑥	USB2.0 interface	Can be connected to a mouse, keyboard, USB flash drive (for copying videos and images)
⑦	Power switch	Switch on/off

Specifications

Models	TE2000
C-mount category	CJ6E-C-50
Physical resolution	50.3MP
Image sensor	SONY IMX06A CMOS
Exposure mode	Rolling Shutter
Maximum resolution	8192×6144 (50,331,648Pixels)
ISO sensitivity	Equivalent to 100-6400
Sensor size	1/0.98"
Pixel size	1.6μm×1.6μm
Spectral response	380-650nm
Exposure capability	Real-time auto and manual adjustment
Exposure time	100us-333ms
White balance	Real-time auto and manual RB adjustment
Preview resolution	8128×6144@16fps, 4096×3072@60fps
Photo resolution	8192×6144, 8128×6144, 8128×4608, 4096×3072, 4096×2304
Power supply	DC 12V 3A
Wireless protocol	WiFi 6E (IEEE802.11ax)
A/D conversion bit depth	10bit
Software and App	Windows Software:KoPa Capture Pro,Embedded software:KoPa WiFi Lab AO,App:KoPa WiFi Lab

Accessories

Power adapter and power cord
(Optional Chinese, American, European,
Australian, Korean, British standard etc.)



DP cable



USB mouse
and keyboard



Desktop Monitor (without
operating system,
optional accessory)



15.6" high brightness, wide color gamut and
blue light filtered ISP display

Number of pixels: 3840 x 2160 P60


Colour gamut: 100% Adobe RGB(135% sRGB)

Contrast: 1500:1


Brightness: $\geq 1000 \text{cd/m}^2$ (average of 5 points)

Dimensions(Unit:mm)

Net weight $\approx 1.3\text{kg}$



Camera with C-mount

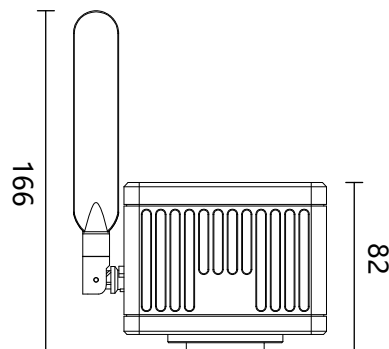

KoPa[®] GuangZhou Ostec Electronic Technology Co.,Limited

Manufacturer: No.8 West Lane, Jiangcheng Road, Bangjiang East Village,Dalong street, Panyu District, Guangzhou, China.



High-Tech Enterprise certificate number:
GR202344009665



ISO9001 Verification No:00223Q26818R3S

The content of this leaflet has been reviewed by our company at the time of its release. Due to technological advancements, actual products are subject to change at any time without prior notice.

The names of other companies, product names, and trademarks **OLYMPUS** **Nikon** **Leica** **ZEISS** **Windows** **Apple** **Android** **HarmonyOS** **W** **Q** **du** recorded on this leaflet are owned by their companies